

### Technical specification:

Name:	SOGA Implant Motor
Rotation Speed Range:	300-40,000rpm
Torque Range:	5Ncm-80Ncm
Gear Ratios:	16:1 20:1 27:1 1:1 1:2 1:4 1:5
Max Pump Output:	110ml/min
Main Unit Dimensions:	236mm*215mm*77mm
Motor Dimensions:	Ø22mm*L108mm
Handpiece Dimensions:	Ø22mm*L96mm
Motor Weight:	90G
Handpiece Weight:	80G
Power Supply:	Ac220v 50-60Hz
Length:	2m
Motor Type:	Swiss Made Brushless Motor
Handpiece Type:	Built-in with Germany Made Bearing

### Shenzhen Soga technology Co., Ltd.

**Contact nubor:** +86-0755-23776690

**Mailbox:** andy@soga12.com

**Website:** dentalsoga.com

**Address:** Room9010, Building 188, Chuangye Garden, North Station Community, Minzhi Street, Longhua District, Shenzhen. Guangdong, China.

**SOGA®**

## IMPLANT MOTOR

ULTIMATE PRECISION HIGH QUALITY SAFETY




SOGA IMPLANT MOTOR WITH MULTIFUNCTIONAL DESIGN OFFERS  
BETTER PERSONAL AND PROFESSIONAL CARE

## Swiss motor & German bearings



## Multi-functional and ergonomic foot controller

ergonomically designed can reduce hand and wrist fatigue, making the implant procedure more comfortable and safer for the patient

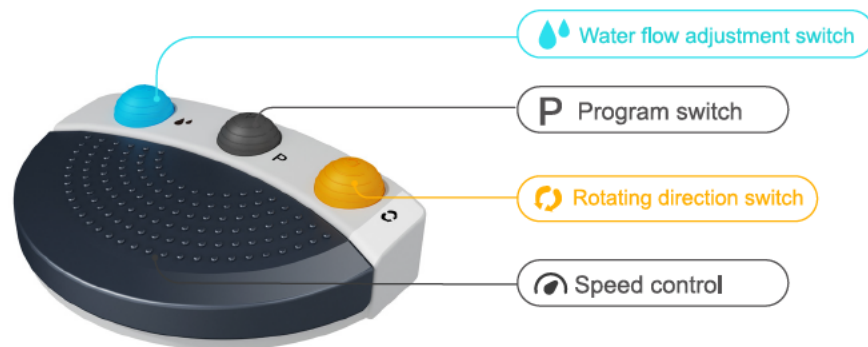

## Small and lightweight equipment

Simple and intuitive user-friendly interface-the touch control panel is clear and easy to use

## Internal mute water


Internal mute water peristaltic pump that is compatible with disposable water tubing up to 110ml/min

## Water adjustment

A small screen can be used to adjust water volume and also provide real-time temperature



## Function description of programs

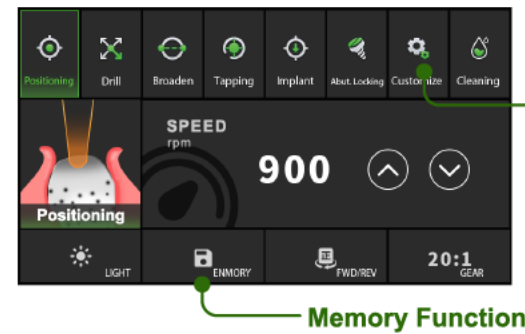

## Program settings

